


New  
**BK200AAP**  
 AA size (HR 15/51)

Standard type

**N** type

■ **Dimensions (with tube)**

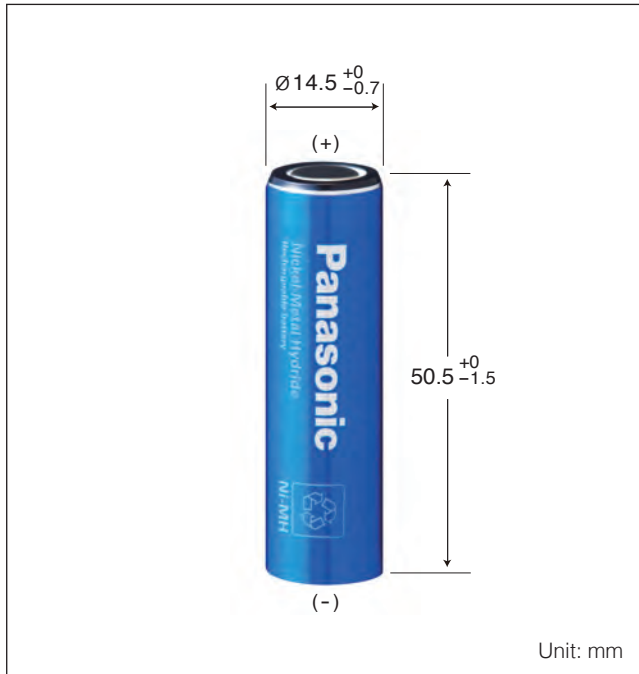



■ **Specifications**

Diameter	14.5 +0 / -0.7 mm
Height	50.5 +0 / -1.5 mm
Approximate Weight	27 g


Nominal Voltage		1.2 V	
Discharge Capacity	Average <sup>*1</sup>	1980 mAh	
	Rated (min.)	1900 mAh	
Approx. Internal impedance at 1000Hz at charged state.		20 mΩ	
Charge	Standard	190 mA X 16 hrs.	
	Rapid <sup>*3</sup>	1900 mA X 1.2 hrs.	
Ambient Temperature	Charge	Standard	-10 °C to 60 °C
		Rapid	-10 °C to 45 °C
	Discharge		-10 °C to 60 °C
	Storage	<1 year	-20 °C to 35 °C
<6 months		-20 °C to 45 °C	
<1 month		-20 °C to 55 °C	
<1 week		-20 °C to 65 °C	

\*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.  
 \*2 For reference only.  
 \*3 Need specially designed control system. Please contact Panasonic for details.

■ **Typical charge characteristics**

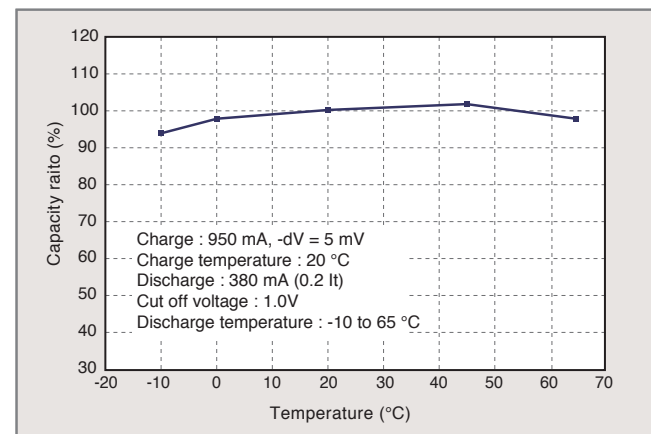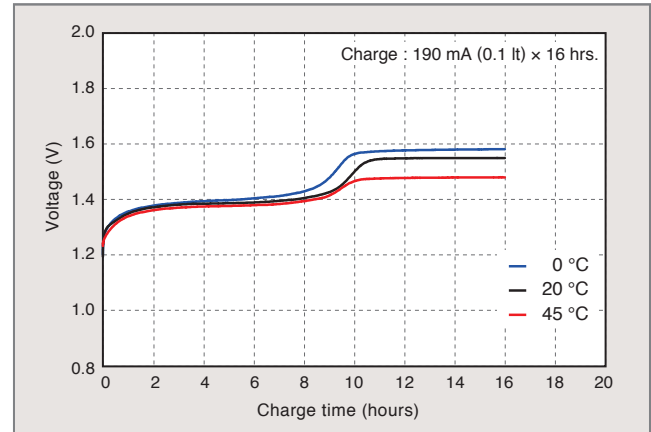

■ **Typical discharge characteristics**

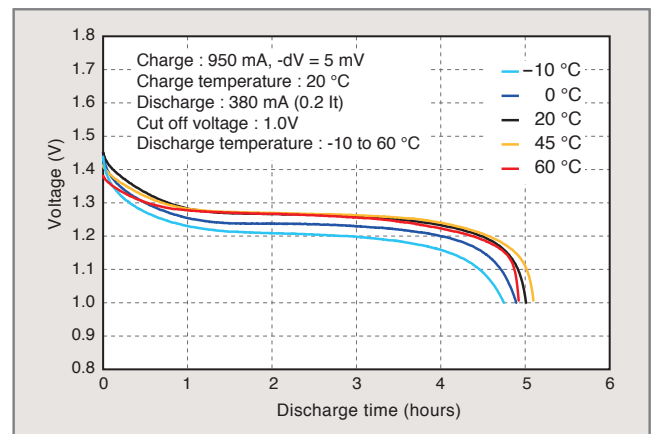

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

\*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.