

Powered by

WAMTECHNIK

Rechargeable Li-ion battery pack – 1698.01.001.3

Configuration: 4S1P




Dimensions:

Length: 74 ±1mm

Width: 22 ±1mm

Height: 69 ±1mm

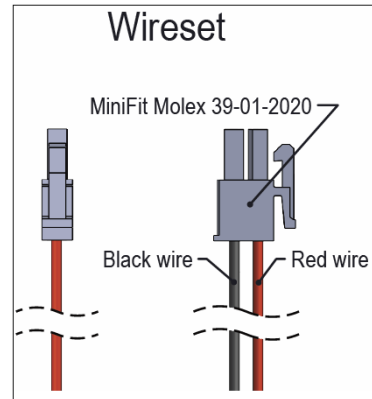

Data for pack

Nominal Voltage		14.6V	
Rated Capacity		2.67Ah	
Used cell in Pack		4pcs	INR18650-29E
Internal resistance pack		230mΩ	±10%
Max charge voltage		16.8V	25°C
Charge current	standard	1.37A	25°C
	rapid	2A	-
Discharge	standard	0.5A	25°C
	max. cont.	2A	25°C
	max. Peak	4.5A	25°C t<15s
Short Circuit current		73A	t<1ms
Cable length		150mm	±5mm
Connector		Molex	MiniFit 39-01-2020
Weight		200g	±10g
Watt-hour rating		39Wh	
Charge temperature	standard	0°C - 45°C	
	rapid	10°C - 40°C	
Discharge temperature		standard	-20°C - 60°C
Storage temperature		1 year	0~23°C
Note 1: Self discharge <1% / month			
Note 2: Delivery SOC aprox. 30%			

Limitations by Safety Unit (SU)

Over Voltage (per cell)	cut off	4.35V	±0.025
	release	4.15V	±0.05
Under Voltage (per cell)	cut off	2.4V	±0.08
	release	3.0V	±0.1
Current Limit 1 by SU		4.5A	t~15s
Current Limit 2 by SU		5.3A	t~60ms
Power Consumption	active		