




N-LFP 100-12 1280 Wh LITHIUM DEEP CYCLE BATTERY



MARINE

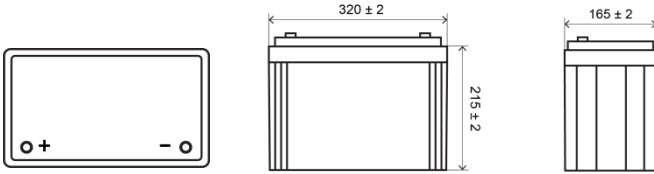

CARAVAN



LIGHT ELECTRIC VEHICLE



UPS



TELECOM



SOLAR & WIND



Li-FePO₄ TECHNOLOGY



LONG LIFE LITHIUM BATTERY


PARAMETERS

NOMINAL VOLTAGE	NOMINAL CAPACITY	NOMINAL ENERGY	WEIGHT	TECHNOLOGY	DESIGNED LIFE	INTERNAL RESISTANCE	TERMINAL TYPE
12,8 V	100 Ah	1280 Wh	12,5 kg	LiFePO ₄ with BMS (electronic management system)	2000 cycles with DOD 100%, 3000 cycles with DOD 80%	≤ 18 mΩ	M8 internal thread (tightening torque 10 ÷ 12 Nm)
MAXIMUM CONTINUOUS DISCHARGE CURRENT	MAXIMUM PULSE DISCHARGE CURRENT	END-OF-DISCHARGE VOLTAGE	CHARGING CURRENT	MAXIMUM CHARGING CURRENT	CHARGING VOLTAGE	CHARGING VOLTAGE FOR STAND-BY OPERATION	SELF DISCHARGE
100 A	350 A (3 sek.)	9,6 V	≤ 50A	100 A (25°C)	14,6 V	13,8 V	average 3% capacity per month (25°C)

DIMENSIONS			OPERATING TEMPERATURE RANGE		
LENGTH	WIDTH	HEIGHT	DISCHARGE	CHARGE	STORAGE
320 mm	165 mm	215 mm	-20°C ~ +60°C	0°C ~ +45°C	-10°C ~ +35°C

CHARACTERISTICS

Charging / Discharging at 25°C

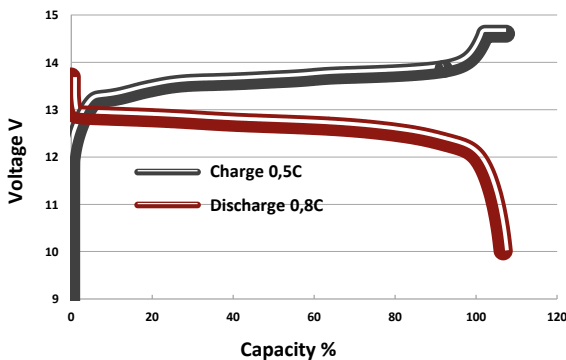

Cyclic life as a function of Depth-Of-Discharge (DoD):

