




SBLFT 180-12i



| | |
|---------------------|--|
| Nominal voltage | 12 V |
| Nominal capacity | 190,8 Ah @ C20 to 1,75 V/cell |
| | 180 Ah @ C10 dla rozładowania to 1,80 V/cell |
| Technology | AGM (Absorbent Glass Mat) |
| | VRLA (Valve Regulated Lead Acid) |
| Weight | ~ 52 kg |
| Design life time | 12 years (standby use) |
| | Long Life acc. Eurobat |
| Internal resistance | ~ 4 mΩ (full charged) |

| | |
|-----------------------------|---------------------------------|
| Operating temperature range | Discharge -20°C ~ +60°C |
| | Charge 0°C ~ +50°C |
| | Storage -20°C ~ +60°C |
| Max. discharge current | 1800 A (5 sec) |
| Short circuit current | 54 A |
| Charging voltage | Standby use 13,6 ~ 13,8 VDC |
| | Cycle use 14,6 ~ 14,8 VDC |
| Self discharge | Monthly is less than 3% at 25°C |
| Container material | ABS UL94HB (optional UL94-V0) |
| Additional option | Centralized venting system |

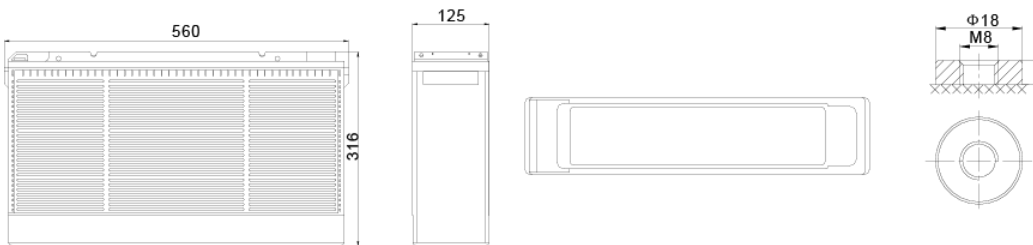

| | |
|----------------|--|
| Length | 560 ±2 mm |
| Width | 125 ±2 mm |
| Height | 316 ±2 mm |
| Total height | 316 ±2 mm |
| Terminal types | Internal thread M8 (breaking torque 10-12 Nm) |


CONSTANT CURRENT DISCHARGE CHARACTERISTICS (A at 25°C)

| Voltage/Time | 15 MIN | 30 MIN | 60 MIN | 2 H | 3 H | 4 H | 5 H | 8 H | 10 H | 20 H |
|--------------|--------|--------|--------|------|------|------|------|------|------|------|
| 1.60V | 310,6 | 193,2 | 110,0 | 65,5 | 50,8 | 39,9 | 34,0 | 22,8 | 19,0 | 9,93 |
| 1.65V | 296,9 | 185,5 | 106,2 | 63,4 | 49,2 | 38,8 | 33,1 | 22,6 | 18,8 | 9,78 |
| 1.70V | 278,1 | 177,3 | 102,8 | 61,3 | 47,9 | 37,8 | 32,2 | 22,2 | 18,5 | 9,66 |
| 1.75V | 258,8 | 169,4 | 99,0 | 59,2 | 46,4 | 36,8 | 31,4 | 21,9 | 18,2 | 9,54 |
| 1.80V | 239,0 | 161,9 | 95,2 | 57,1 | 45,0 | 35,7 | 30,6 | 21,5 | 18,0 | 9,44 |
| 1.85V | 198,3 | 139,5 | 85,4 | 52,3 | 41,6 | 33,2 | 28,5 | 20,2 | 16,9 | 8,97 |


CONSTANT POWER DISCHARGE CHARACTERISTICS (W/cell at 25°C)

| Voltage/Time | 15 MIN | 30 MIN | 60 MIN | 2 H | 3 H | 4 H | 5 H | 8 H | 10 H | 20 H |
|--------------|--------|--------|--------|-------|------|------|------|------|------|------|
| 1.60V | 543,0 | 350,9 | 206,7 | 124,2 | 97,0 | 76,6 | 65,5 | 44,6 | 37,3 | 19,6 |
| 1.65V | 526,8 | 340,4 | 200,7 | 120,8 | 94,4 | 74,8 | 64,0 | 44,2 | 36,9 | 19,3 |
| 1.70V | 500,8 | 328,6 | 195,4 | 117,5 | 92,2 | 73,1 | 62,6 | 43,6 | 36,4 | 19,1 |
| 1.75V | 472,8 | 317,3 | 189,4 | 113,9 | 89,8 | 71,5 | 61,2 | 43,1 | 36,0 | 18,9 |
| 1.80V | 442,7 | 306,3 | 183,2 | 110,4 | 87,4 | 69,6 | 59,8 | 42,4 | 35,6 | 18,7 |
| 1.85V | 372,6 | 266,5 | 165,3 | 101,7 | 81,2 | 65,0 | 56,0 | 39,9 | 33,5 | 17,8 |

EFFECT OF TEMPERATURE ON LONG TERM LIFE

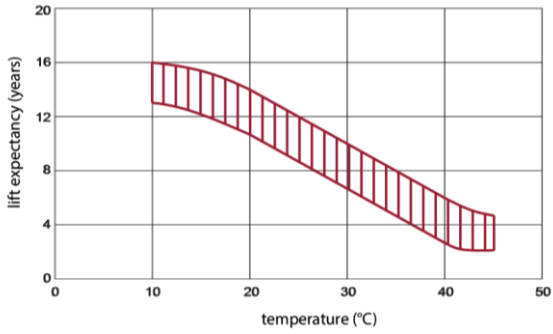


CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

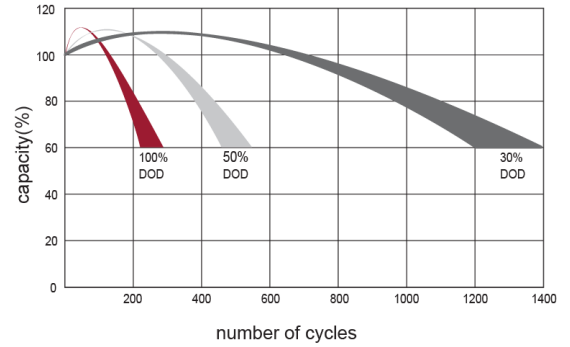


DISCHARGE CHARACTERISTICS CURVE



CHARGE CHARACTERISTIC CURVE FOR CYCLE USE

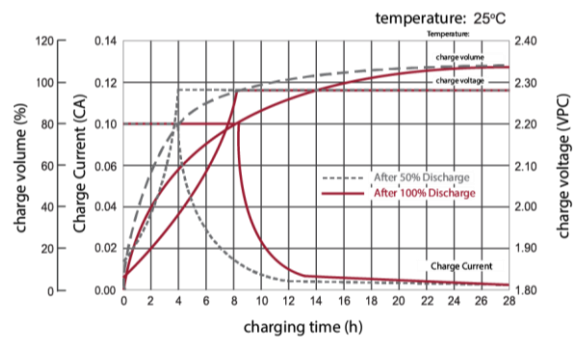

RELATIONSHIP BETWEEN CHARGING VOLTAGE AND TEMPERATURE

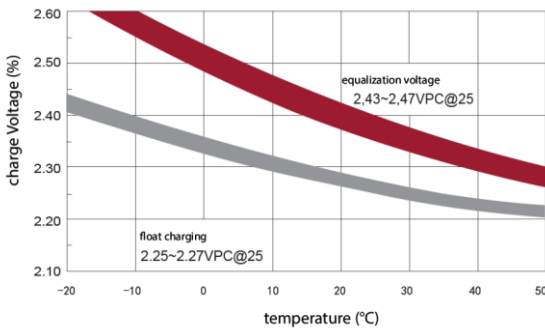



STORAGE CHARACTERISTICS



Standards met:

PN-EN 60896-21:2007 • PN-EN 60896-22:2007 • PN-EN 61056-1:2013 • PN-EN 61056-2:2013 • PN-E-83016:1999

Batteries manufactured in compliance with: ISO 9001 • ISO 14001



All data contained in this document, are subject to change. Wamtechnik Sp. z o.o. reserves the right to change them without prior notice.