




SBCG 55-12i



| | |
|---------------------|---|
| Nominal voltage | 12 V |
| Nominal capacity | 55 Ah @ C20 to 1,75 V/cell |
| Technology | Electrolyte – GEL VRLA (Valve Regulated Lead Acid) |
| Weight | ~ 16,5 kg |
| Design life time | 15 years (standby use) Very Long Life wg Eurobat |
| Internal resistance | ~ 11,5 mΩ (full charged) |

| | |
|-----------------------------|---------------------------------|
| Operating temperature range | Discharge -40°C ~ +60°C |
| | Charge -20°C ~ +50°C |
| | Storage -40°C ~ +60°C |
| Maximum discharge current | 550 A (5 sec) |
| Maximum charging current | 11 A |
| Charging voltage | Standby use 13,6 ~ 13,8 VDC |
| | Cycle use 14,2 ~ 14,4 VDC |
| Self discharge | Monthly is less than 2% at 25°C |
| Container material | ABS UL94HB (optional UL94-V0) |

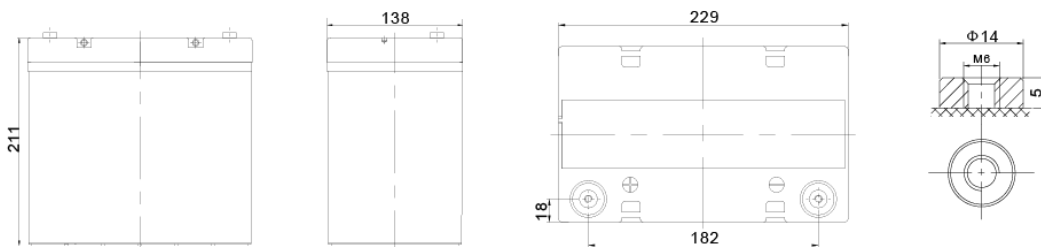

| | |
|----------------|--|
| Length | 229 ± 2 mm |
| Width | 138 ± 2 mm |
| Height | 211 ± 2 mm |
| Total height | 216 ± 2 mm |
| Terminal types | Internal thread M6 (breaking torque 8-10Nm) |


CONSTANT CURRENT DISCHARGE CHARACTERISTICS (A at 25°C)

| Voltage/Time | 10 MIN | 15 MIN | 30 MIN | 60 MIN | 2 H | 3 H | 4 H | 5 H | 8 H | 10 H | 20 H |
|--------------|--------|--------|--------|--------|------|------|------|------|------|------|------|
| 1.60V | 90,0 | 73,0 | 47,9 | 29,9 | 18,2 | 13,7 | 10,9 | 9,16 | 6,19 | 5,11 | 2,86 |
| 1.65V | 85,1 | 69,8 | 46,0 | 28,8 | 17,7 | 13,3 | 10,6 | 8,92 | 6,12 | 5,04 | 2,82 |
| 1.70V | 78,3 | 65,4 | 44,0 | 27,9 | 17,1 | 12,9 | 10,3 | 8,69 | 6,03 | 4,97 | 2,78 |
| 1.75V | 71,7 | 60,9 | 42,0 | 26,9 | 16,5 | 12,5 | 10,1 | 8,47 | 5,94 | 4,90 | 2,75 |
| 1.80V | 64,9 | 56,2 | 40,2 | 25,9 | 15,9 | 12,1 | 9,8 | 8,25 | 5,84 | 4,84 | 2,72 |
| 1.85V | 53,0 | 46,6 | 34,6 | 23,2 | 14,6 | 11,2 | 9,1 | 7,69 | 5,48 | 4,56 | 2,58 |


CONSTANT POWER DISCHARGE CHARACTERISTICS (W/cell at 25°C)

| Voltage/Time | 10 MIN | 15 MIN | 30 MIN | 60 MIN | 2 H | 3 H | 4 H | 5 H | 8 H | 10 H | 20 H |
|--------------|--------|--------|--------|--------|------|-------|-------|-------|-------|-------|------|
| 1.60V | 153,1 | 127,7 | 87,0 | 56,1 | 34,6 | 26,10 | 21,00 | 17,70 | 12,10 | 10,00 | 5,64 |
| 1.65V | 145,6 | 122,7 | 84,3 | 54,6 | 33,7 | 25,50 | 20,50 | 17,30 | 12,00 | 9,91 | 5,57 |
| 1.70V | 138,2 | 117,7 | 81,5 | 53,1 | 32,7 | 24,80 | 20,00 | 16,90 | 11,80 | 9,79 | 5,49 |
| 1.75V | 128,8 | 111,2 | 78,7 | 51,4 | 31,7 | 24,20 | 19,50 | 16,50 | 11,70 | 9,67 | 5,43 |
| 1.80V | 118,6 | 104,1 | 76,0 | 49,8 | 30,7 | 23,60 | 19,10 | 16,10 | 11,50 | 9,56 | 5,39 |
| 1.85V | 98,7 | 87,6 | 66,1 | 44,9 | 28,3 | 21,90 | 17,80 | 15,10 | 10,80 | 9,02 | 5,12 |


EFFECT OF TEMPERATURE ON LONG TERM LIFE

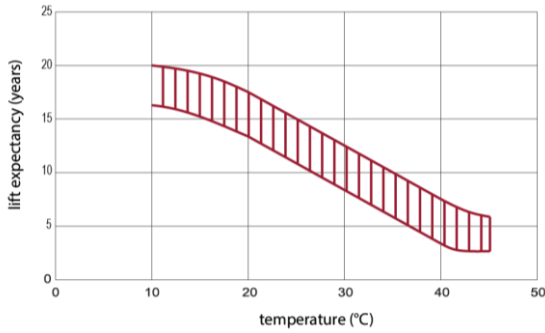


CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

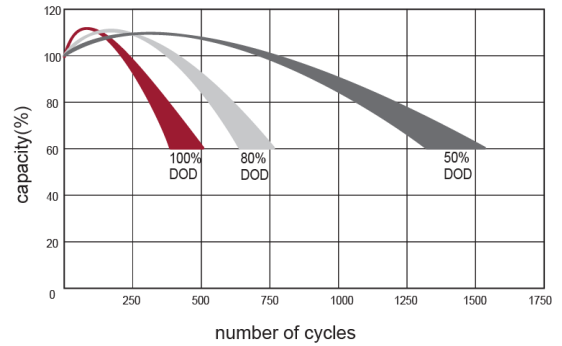


DISCHARGE CHARACTERISTICS CURVE

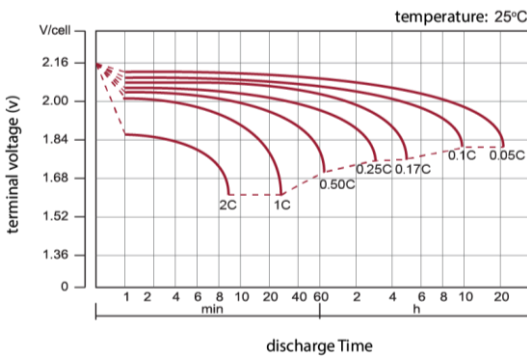


CHARGE CHARACTERISTIC CURVE FOR CYCLE USE

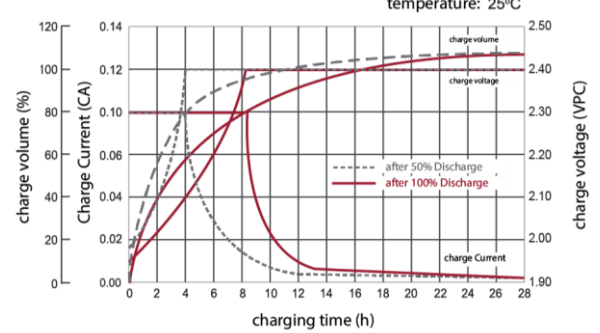

RELATIONSHIP BETWEEN CHARGING VOLTAGE AND TEMPERATURE

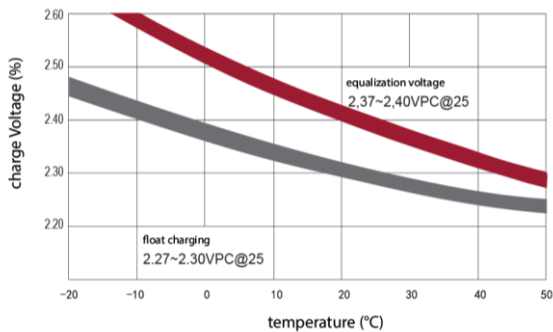




STORAGE CHARACTERISTICS

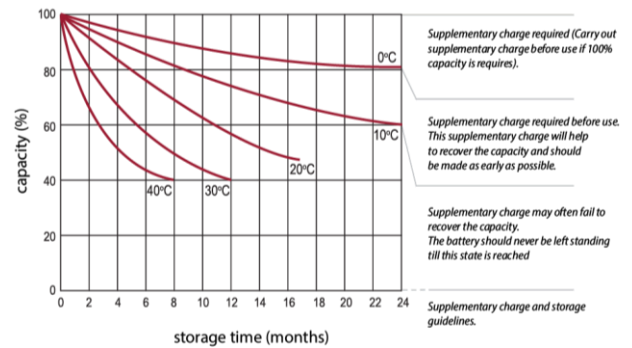

Standards met:

PN-EN 60896-21:2007 • PN-EN 60896-22:2007 • PN-EN 61056-1:2013 • PN-EN 61056-2:2013 • PN-E-83016:1999

Batteries manufactured in compliance with: ISO 9001 • ISO 14001



All data contained in this document, are subject to change. Wamtechnik Sp. z o.o. reserves the right to change them without prior notice.

Wamtechnik Sp. z o.o. ul. Techniczna 2 bud. H 05-500 Piaseczno
Tel. +48 22 701 26 00, office@wamtechnik.pl, www.wamtechnik.pl