


## **BR1225A**

# **BR Coin-type Lithium Battery for high temperature**

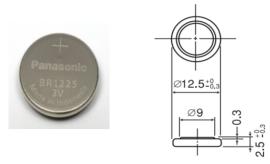

#### **Features & Benefits**

In addition to the appeal of our BR series coin-type lithium batteries, poly-carbonmonofluoride cells can operate in the temperatures up to  $125\,^{\circ}\text{C}$ 

### **Applications**

Automotive electronic components(TPMS, ETC), hot water and electricity meters, memory backup(host computers, FA equipment), etc.

### **Specifications**

_		
Nominal voltage		3V
Nominal capacity		48mAh
Continuous drain		0.03mA
Dimensions*1	Diameter(Max.)	12.5mm
	Height(Max.)	2.5mm
Weight*1		Approx. 0.8g
Operating temperature		-40°C to +125°C


<sup>\*1</sup> Without tabs.

## **Terminal types**

Please see the documents for the terminal and lead wire settings.

- .Line up of tab terminal types(by shape)
- Line up of tab terminal types(by product number)

#### Discharge temperature characteristics

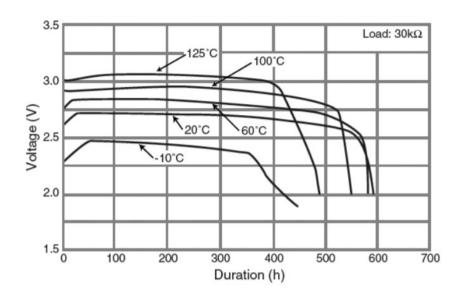

#### Panasonic Energy Co., Ltd.

https://industry.panasonic.eu/products/energy-building/batteries/battery-cells/primary-batteries/lithium-batteries

